


LEONI Part No.: **95040033A**

LEHC 002054 Rev.0

construction

Weitergabe an Dritte nur mit Genehmigung der Fa. LEONI Kabel GmbH - Alle Rechte vorbehalten -
 Transfer to third party only by authority of LEONI Kabel GmbH
 Nur gültig zum Zeitpunkt des Ausdrucks. Bei Wiederverwendung Aktualität prüfen – Nur zur Information
 Valid only at time of printing. In case of re-use check issue – Only for Information

LEONI Kabel

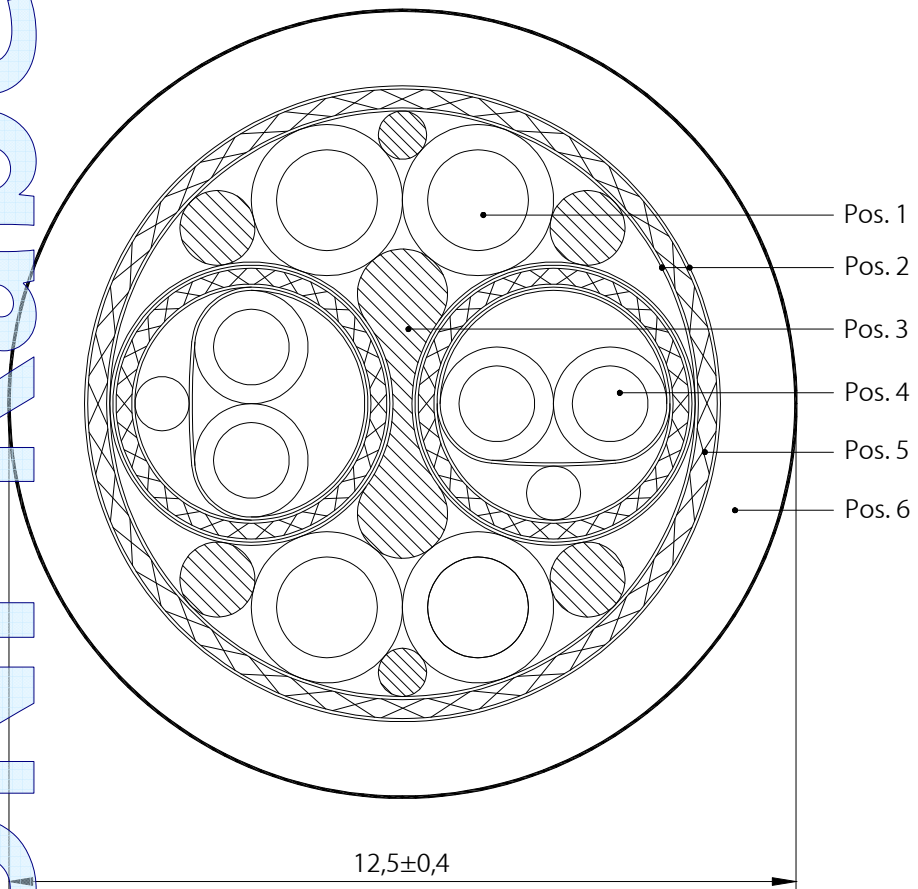

All indications on this data sheet have been made to the best of our knowledge. They are only a not binding advice and serve as a starting point for plannings. They don't release the user from own tests regarding the suitability of the desired application purposes. Processing and use of the products cannot be controlled by us and are therefore exclusively in your field of responsibility. Subject to alterations if new realization will make it necessary.

LEONI Part No.: **95040033A**

LEHC 002054 Rev.0

cable description

Pos. 1 4 insulated wires 1,5 mm²


conductor

bare copper, single wire 0,15 mm
in accordance to DIN EN 60228 cl. 6 / IEC 60228 cl. 6
TPE
black wires with white numbers 1-- 3, greenyellow




insulation
colours

Pos. 2 tapings



Pos. 3 filler



Pos. 4 2 shielded pairs 2x0,75 mm²

conductor

bare copper, single wire 0,15 mm
in accordance to DIN EN 60228 cl. 6 / IEC 60228 cl. 6
TPE
black wires with white numbers 5 – 8

insulation
colours

taping
drainwire 0,5 mm²
1. shielding
2. shielding

tin plated copper, single wire 0,15 mm
both sides aluminized polyester tape
braiding of tinned copper wires 0,10 mm
optical covering min. 85 %

tapings

Pos. 5 shielding




braiding of tinned copper wires 0,128 mm
optical covering min. 85 %

Pos. 6 outer jacket



colour

Polyurethan in accordance to DIN VDE 0282 part 10 / HD22.10 S2
orange mat following RAL 2003
green mat following RAL 6018
LEONI A FieldLink MC LEHC 002054 Rev.0
[4x1,5+2x(2x0,75)] XX/YYYY
E47543  AWM STYLE 20234 I/II A/B 80C 1000V FT-1
production week
production year
12,5 ± 0,4 mm

overprint in black with Inkjet

XX
YYYY

outer diameter



Weitergabe an Dritte nur mit Genehmigung der Fa. LEONI Kabel GmbH - Alle Rechte vorbehalten -
Transfer to third party only by authority of LEONI Kabel GmbH
Nur gültig zum Zeitpunkt des Ausdrucks. Bei Wiederverwendung Aktualität prüfen - Nur zur Information
Valid only at time of printing. In case of re-use check issue - Only for Information

All indications on this data sheet have been made to the best of our knowledge. They are only a not binding advice and serve as a starting point for plannings.
They don't release the user from own tests regarding the suitability of the desired application purposes.
Processing and use of the products cannot be controlled by us and are therefore exclusively in your field of responsibility.
Subject to alterations if new realization will make it necessary.

LEONI Part No.: **95040033A**

LEHC 002054 Rev.0

Electrical properties

operating voltage	Pos. 1	U_0/U	0,6/1,0 kV
	Pos. 1 according to 	max.	1000 V
	Pos. 4	max.	24 V
test voltage	Pos. 4 according to 	max.	1000 V
	Pos. 1 conductor/conductor		4,0 kV 50Hz AC
	Pos. 1 conductor/shield		3,0 kV 50Hz AC
	Pos. 4 conductor/conductor		4,0 kV 50Hz AC
	Pos. 4 conductor/shield		3,0 kV 50Hz AC
conductor resistance	Pos. 1	max.	13,3 Ω /km at +20°C
	Pos. 4	max.	26,0 Ω /km at +20°C

Mechanical properties

bending radius for fixed installation	min.	6 x outside diameter
for drag chain installation	min.	12 x outside diameter*
acceleration	max.	5 m/s ²
traversing speed	max.	180 m/min
bendings in drag chains	min.	10.000.000
torque at a length of 1000 mm	max.	± 30 degree
horizontal length of the cable	max.	5 m
total weight	nom.	252 kg/km

Thermal properties

treatment and installation	-20°C bis +60°C
transport and stocking	-50°C bis +80°C
operating for fixed installation	-50°C bis +80°C
for drag chain installation	-20°C bis +60°C
short cut	max. +150°C (≤ 5 sec.)

Weitergabe an Dritte nur mit Genehmigung der Fa. LEONI Kabel GmbH - Alle Rechte vorbehalten -
 Transfer to third party only by authority of LEONI Kabel GmbH
 Nur gültig zum Zeitpunkt des Ausdrucks. Bei Wiederverwendung Aktualität prüfen - Nur zur Information
 Valid only at time of printing. In case of re-use check issue - Only for Information

All indications on this data sheet have been made to the best of our knowledge. They are only a not binding advice and serve as a starting point for plannings. They don't release the user from own tests regarding the suitability of the desired application purposes. Processing and use of the products cannot be controlled by us and are therefore exclusively in your field of responsibility. Subject to alterations if new realization will make it necessary.

LEONI Part No.: **95040033A**

LEHC 002054 Rev.0

Chemical properties

oil resistant in accordance to VDE 0282 part 10 / HD 22.10 S2 (test method to EN60811-2-1)
 oil resistant in accordance to DIN EN 50363-10-2 (test method to EN60811-2-1)
 flame retardant in accordance to UL 1581 Vertical Wire Flame Test (VW-1)
 flame retardant in accordance to CSA C22.2 Vertical Flame Test (FT-1)
 flame retardant in accordance to IEC 60332-1-2
 halogen free in accordance to VDE 0472 part 813 / IEC 60754-2
 free of silicon and FCKW



the cable corresponds to EU – directive 2002/95/EG (RoHS)

Standard

UL Subject 758 and CSA - C22.2 No. 210



Cable is approved to UL Style 20234 80°C 1000V VW-1 and cUL AWM I/II A/B 80°C 1000V FT-1

INFORMATION

Weitergabe an Dritte nur mit Genehmigung der Fa. LEONI Kabel GmbH - Alle Rechte vorbehalten -
 Transfer to third party only by authority of LEONI Kabel GmbH
 Nur gültig zum Zeitpunkt des Ausdrucks. Bei Wiederverwendung Aktualität prüfen – Nur zur Information
 Valid only at time of printing. In case of re-use check issue – Only for Information

All indications on this data sheet have been made to the best of our knowledge. They are only a not binding advice and serve as a starting point for plannings.
 They don't release the user from own tests regarding the suitability of the desired application purposes.
 Processing and use of the products cannot be controlled by us and are therefore exclusively in your field of responsibility.
 Subject to alterations if new realization will make it necessary.